


Zero-g

Tank Plate Welded

Welded flush to the tank bottom for a smooth, clean surface that prevents contamination. Designed to work with Metenova's Zero-g mixers for reliable, hygienic performance in demanding applications.

General
Mixing
Applications

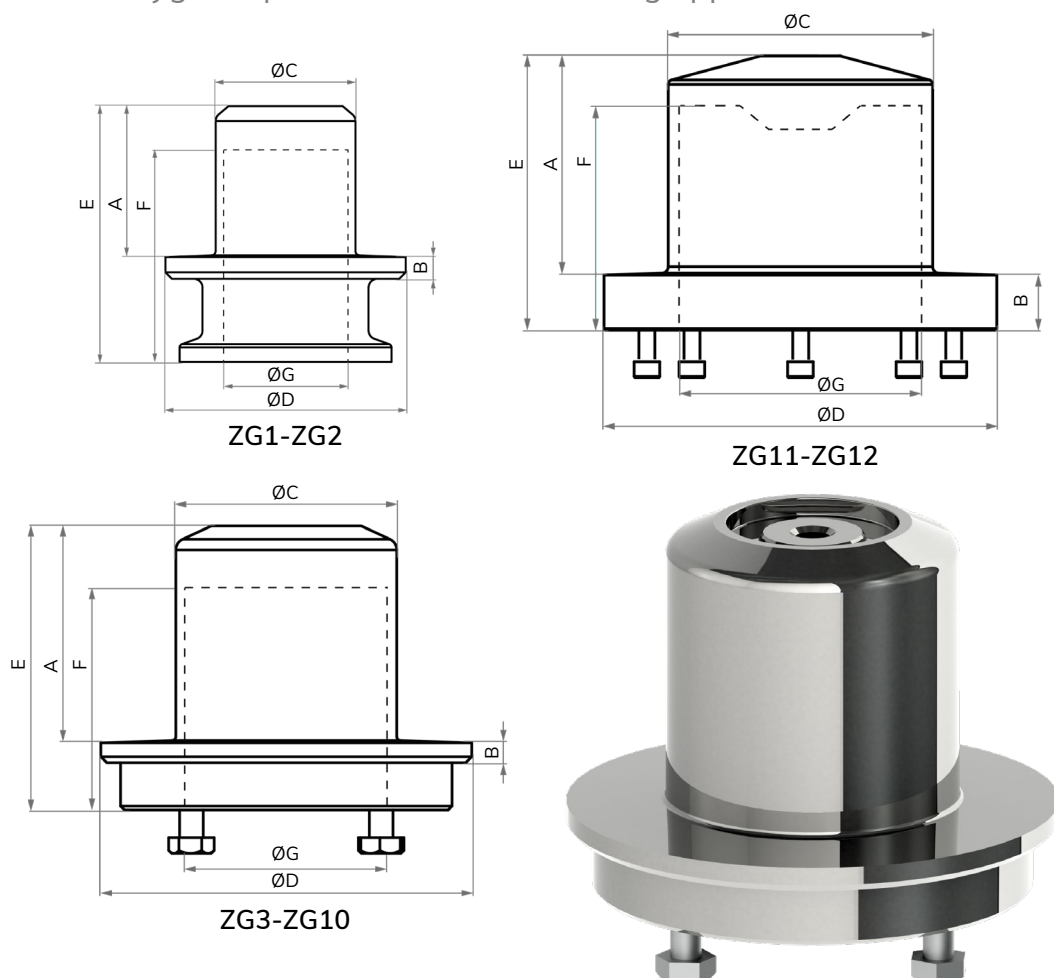

Measurements

Mixer model	Article Number	A mm (in)	B mm (in)	ØC mm (in)	ØD mm (in)	E mm (in)	F mm (in)	ØG mm (in)	Weight kg (lb)
ZG1, ZG2	ZG00506-00838	35 (1.38)	5 (0.20)	32 (1.26)	55 (2.17)	59 (2.32)	48.5 (1.91)	28 (1.10)	0.3 (0.7)
ZG3	ZG12506-00206	45 (1.77)	5 (0.20)	56 (2.20)	94 (3.70)	62 (2.44)	45 (1.77)	51 (2.01)	0.9 (2.0)
ZG5	ZG52506-00079	55 (2.17)	5 (0.20)	56 (2.20)	94 (3.70)	72 (2.83)	55 (2.17)	51 (2.01)	0.9 (2.0)
ZG6	ZG13506-00117	56.5 (2.22)	5 (0.20)	64 (2.52)	104 (4.09)	73.5 (2.89)	56.5 (2.22)	59 (2.32)	1.2 (2.6)
ZG7	ZG23506-00288	60 (2.36)	5 (0.20)	87 (3.43)	129.5 (5.10)	77 (3.03)	57 (2.24)	82 (3.23)	1.6 (3.5)
ZG8	ZG53506-00343	63 (2.48)	5 (0.20)	106 (4.17)	159.5 (6.28)	83 (3.27)	60 (2.36)	101 (3.98)	2.7 (6.0)
ZG9	ZG14506-00504	75 (2.95)	5 (0.20)	146 (5.75)	199.5 (7.85)	95 (3.74)	69 (2.72)	141 (5.55)	4.3 (9.5)
ZG10	ZG24506-00613	80 (3.15)	5 (0.20)	176 (6.93)	229.5 (9.04)	100 (3.94)	69 (2.72)	170 (6.69)	6.2 (13.7)
ZG11	ZG34506-3012081	84 (3.31)	35 (1.38)	168 (6.61)	249.5 (9.82)	119 (4.69)	83 (3.28)	162 (6.38)	11.8 (26.0)
ZG12	ZG64506-06739	139 (5.47)	35 (1.38)	168 (6.61)	249.5 (9.82)	174 (6.85)	147 (5.79)	162 (6.38)	12.7 (28.0)

General Information

Material	Stainless Steel ASME TP 316L acc. to SA-479 & EN 1.4404 acc. to EN 10272 (Other materials are available upon request)
Inspection Certificate	EN 10204 Type 3.1
Surface Roughness	Ra ≤ 0.38 µm (15 µin)
Surface Treatment	Manually polished. Non animal origin polishing compounds are used.
Operating Temperature	0°C - 150°C (32°F - 302°F)*
Design Pressure	ZG1 – ZG10: -1 – 10 barg (-14.5 – 145 psig); ZG11 – ZG12: -1 – 7 barg (-14.5 – 101.5 psig)
Operating Pressure	-1 – 7 barg (-14.5 – 101.5 psig)
Packing and Marking	Items are individually packed and for traceability purposes marked with item & id no.
Quality Assurance	Metenova Quality Assurance system ensures the quality and traceability at all stages of the process.

*Not for use with frozen media

Product key

Complete item number with add-on

ZGXXXXX-[] XXXXX []= 0, A, B, C, D, E

Material Code	Standard Material
0	Stainless Steel ASME TP 316L acc. to SA-479 & EN 1.4404 acc. to EN 10272 UNS S31603
Optional Material* (Add on)	
A	Stainless Steel ASME TP 316L acc. to SA-479 UNS S31603; EN 1.4435 acc. to EN 10272 (PED)
B	Stainless Steel 904L/EN 1.4539 ASME SB-649 UNS N08904; EN10272 (PED)
C	Alloy C-22 acc to ASME SB-574 UNS N06022; EN 2.4602 (PED)
D	Alloy C-276 acc to ASME SB-574 UNS N10276; EN 2.4819 (PED)
E	AL-6XN UNS N08367; ASME SB-691; EN 1.4529 (PED)

*Example of materials, other materials available upon request