
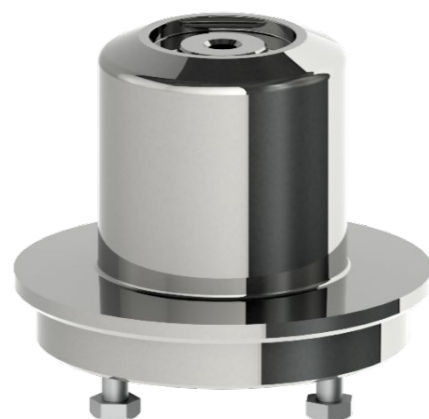
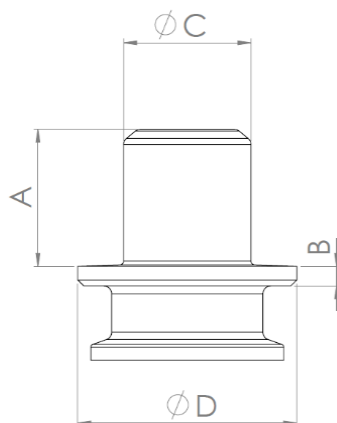


High Power

Tank Plate

The High Power mixer is a solid and liquid mixer which primary objective is to create and maintain a dispersion of solids in a liquid phase that is appropriate for the desired process result.

Powder and
Vigorous Mixing
Applications

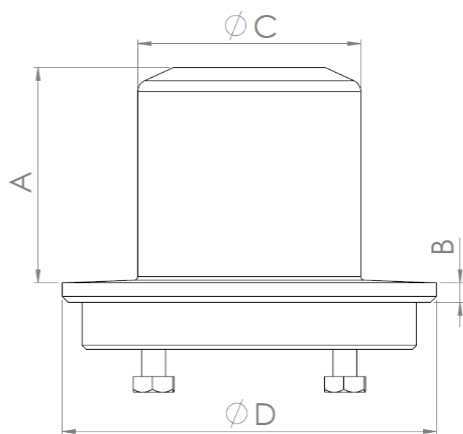

Measurements

Mixer model	Article Number	A mm (in)	B mm (in)	ØC mm (in)	Welding Diameter ØD mm (in)	Weight kg (lb)
HP2	ZG00506-00838	35 (1.38)	5 (0.20)	32 (1.26)	55 (2.17)	0.4 (0.9)
HP5	ZG52506-00079	55 (2.17)	5 (0.20)	56 (2.20)	94 (3.70)	1 (2.2)
HP8	HP53506-03820	90 (3.54)	5 (0.20)	87 (3.43)	160 (6.28)	3.3 (7.3)

General Information

Material	Stainless Steel AISI 316L (1.4404) ASME SA-479 EN 10272 (PED) (Other materials are available upon request.)
Certificate	EN10204 3.1
Surface Roughness	Ra ≤ 0.38 µm (15 µin)
Surface Treatment	Manually polished. Non animal origin polishing compounds are used.
Operating Temp	5°C - 150°C (41°F - 302°F)
pH Range	1 - 14
Design Pressure	-1 - 10 barg (-14.5 - 145 psig)

Metenova



www.metenova.com

Phone: +46 (0)31-335 95|00 +1(908) 537|4199 E-mail: info@metenova.com

The information in this publication is subject to change without prior notice. The information in this document is believed to be complete and accurate at the time of publication. Metenova assumes no responsibility for any errors that may appear in this document. Customer is responsible for determining Metenova's product will perform suitable in the intended application